

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/US04/016641

International filing date: 26 May 2004 (26.05.2004)

Document type: Certified copy of priority document

Document details: Country/Office: US
Number: 60/496,720
Filing date: 20 August 2003 (20.08.2003)

Date of receipt at the International Bureau: 23 August 2004 (23.08.2004)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

1208425

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

August 09, 2004

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE.

APPLICATION NUMBER: 60/496,720

FILING DATE: *August 20, 2003*

RELATED PCT APPLICATION NUMBER: *PCT/US04/16641*

Certified by



Jon W Dudas

Acting Under Secretary of Commerce
for Intellectual Property
and Acting Director of the U.S.
Patent and Trademark Office

PROVISIONAL APPLICATION FOR PATENT COVER SHEET
This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

Expr ss Mail Label No. EV 321471065 US

U.S. PTO
21909
60/496720
08/20/03

INVENTOR(S)		Residence	
Given Name (first and middle (if any))	Family Name or Surname	(City and either State or Foreign Country)	
Frank	Glaug	Chester Springs, Pennsylvania	
Robert	Cole	Jackson, New Jersey	
<input type="checkbox"/> Additional inventors are being named on the _____ separately numbered sheet(s) attached hereto			
TITLE OF THE INVENTION (500 characters max)			
ABSORBENT CORES FOR ABSORBENT ARTICLES AND METHOD FOR MAKING SAME			
CORRESPONDENCE ADDRESS			
Direct all correspondence to:			
<input checked="" type="checkbox"/> Insert Customer Number 23122			
OR			
<input type="checkbox"/> Firm or Individual Name			
Address			
Address			
City	State	Zip Code	
Country	Telephone No.	Fax No.	
ENCLOSED APPLICATION PARTS (check all that apply)			
<input checked="" type="checkbox"/> Specification - Number of Pages 21		<input type="checkbox"/> CD(s) - Number 	
<input checked="" type="checkbox"/> Drawing(s) - Number of Sheets 2		<input checked="" type="checkbox"/> Other (please specify) <u>Fee Transmittal</u>	
<input type="checkbox"/> Application Data Sheet (see 37 CFR 1.76)			
<input type="checkbox"/> Other (please specify) <u>Return Postcard</u>			
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT (check one)			
<input type="checkbox"/> Applicant(s) claim(s) small entity status (see 37 CFR 1.27)			
<input checked="" type="checkbox"/> A check or money order is enclosed to cover the filing fees.			
<input checked="" type="checkbox"/> The Director is hereby authorized to charge filing fees or credit any overpayment to Deposit Account No.: 18-0350 Filing Fee Amount \$160.00			
<input type="checkbox"/> Payment by credit card. Form PTO-2038 is attached.			
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.			
<input checked="" type="checkbox"/> No.			
<input type="checkbox"/> Yes, the name of the U.S. Government Agency and the Government Contract Number are:			

[Page 1 of 2]

Respectfully submitted,

SIGNATURE

Joshua L. Cohen

TYPED or PRINTED NAME Joshua L. Cohen

TELEPHONE NUMBER (610) 407-0700

Date: August 20, 2003

Registration No.: (if appropriate): 38,040

Docket Number: GCC-3123USP

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Mail Stop Provisional Patent Application, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

FEE TRANSMITTAL for FY 2003

Effective 01/01/2003. Patent fees are subject to annual revision.

☐ Applicant claims small entity status. See 37 CFR 1.27

TOTAL AMOUNT OF PAYMENT (\$) 160

Complete if Known

Application Number (to be assigned)
Filing Date (herewith)
First Named Inventor Frank Glaug
Examiner Name
Art Unit
Attorney Docket No. GCC-3123USP

METHOD OF PAYMENT (check all that apply)

☒ Check ☐ Credit Card ☐ Money Order ☐ Other ☐ None

☒ Deposit Account:

Deposit Account Number 18-0350
Deposit Account Name RatnerPrestia

The Commissioner is authorized to: (check all that apply)

☐ Charge fee(s) indicated below
☒ Credit any overpayments
☒ Charge any additional fee(s) during the pendency of this application
☐ Charge fee(s) indicated below, except for the filing fee to the above-identified deposit account.

FEE CALCULATION

1. BASIC FILING FEE

Large Entity		Small Entity		Fee Description	Fee Paid
Fee Code	Fee (\$)	Fee Code	Fee (\$)		
1001	750	2001	375	Utility filing fee	
1002	330	2002	165	Design filing fee	
1003	520	2003	260	Plant filing fee	
1004	750	2004	375	Reissue filing fee	
1005	160	2005	80	Provisional filing fee	160
SUBTOTAL (1)					(\$ 160)

2. EXTRA CLAIM FEES FOR UTILITY AND REISSUE

			Extra Claims		Fee from below		Fee Paid	
Total Claims	<input type="text"/>	-20**	=	<input type="text" value="0"/>	X	<input type="text"/>	=	<input type="text" value="0"/>
Independent Claims	<input type="text"/>	-3**	=	<input type="text" value="0"/>	X	<input type="text"/>	=	<input type="text" value="0"/>
Multiple Dependent					X	<input type="text"/>	=	<input type="text" value="0"/>

Large Entity		Small Entity		Fee Description
Fee Code	Fee (\$)	Fee Code	Fee (\$)	
1202	18	2202	9	Claims in excess of 20
1201	84	2201	42	Independent claims in excess of 3
1203	280	2203	140	Multiple dependent claim, if not paid
1204	84	2204	42	** Reissue independent claims over original patent
1205	18	2205	9	** Reissue claims in excess of 20 and over original patent

SUBTOTAL (2) (\$ 0)

**or number previously paid, if greater; For Reissues, see above

FEE CALCULATION (continued)

3. ADDITIONAL FEES

Large Entity		Small Entity		Fee Description	Fee Paid
Fee Code	Fee (\$)	Fee Code	Fee (\$)		
1051	130	2051	65	Surcharge - late filing fee or oath	
1052	50	2052	25	Surcharge - late provisional filing fee or cover sheet	
1053	130	1053	130	Non-English specification	
1812	2,520	1812	2,520	For filing a request for <i>ex parte</i> reexamination	
1804	920*	1804	920*	Requesting publication of SIR prior to Examiner action	
1805	1,840*	1805	1,840*	Requesting publication of SIR after Examiner action	
1251	110	2251	55	Extension for reply within first month	
1252	410	2252	205	Extension for reply within second month	
1253	930	2253	465	Extension for reply within third month	
1254	1,450	2254	725	Extension for reply within fourth month	
1255	1,970	2255	985	Extension for reply within fifth month	
1401	320	2401	160	Notice of Appeal	
1402	320	2402	160	Filing a brief in support of an appeal	
1403	280	2403	140	Request for oral hearing	
1451	1,510	1451	1,510	Petition to institute a public use proceeding	
1452	110	2452	55	Petition to revive - unavoidable	
1453	1,300	2453	650	Petition to revive - unintentional	
1501	1,300	2501	650	Utility issue fee (or reissue)	
1502	470	2502	235	Design issue fee	
1503	630	2503	315	Plant issue fee	
1460	130	1460	130	Petitions to the Commissioner	
1807	50	1807	50	Processing fee under 37 CFR 1.17(q)	
1806	180	1806	180	Submission of Information Disclosure Stmt	
8021	40	8021	40	Recording each patent assignment per property (times number of properties)	
1809	750	2809	375	Filing a submission after final rejection (37 CFR § 1.129(a))	
1810	750	2810	375	For each additional invention to be examined (37 CFR § 1.129(b))	
1801	750	2801	375	Request for Continued Examination (RCE)	
1802	900	1802	900	Request for expedited examination of a design application	

Other fee (specify)

*Reduced by Basic Filing Fee Paid

SUBTOTAL (3)

(\$ 0)

SUBMITTED BY

Complete (if applicable)

Name (Print/Type) Joshua L. Cohen Registration No. Attorney/Agent 38,040 Telephone (610) 407-0700
Signature Joshua L. Cohen Date August 20, 2003

WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

This collection of information is required by 37 CFR 1.17 and 1.27. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 (1-800-786-9199) and select option 2.

CERTIFICATE OF MAILING BY "EXPRESS MAIL" (37 CFR 1.10)

Applicant(s): Frank Glaug and Robert Cole

Docket No.

GCC-3123USP

Serial No.

(to be assigned)

Filing Date

(herewith)

Examiner

Group Art Unit

Invention: ABSORBENT CORES FOR ABSORBENT ARTICLES AND METHOD FOR MAKING SAME

I hereby certify that the following correspondence:

Provisional Application Cover Sheet; Specification, Claims, and Abstract (21 pgs); Drawings (2 sheets);
Fee Transmittal and Check \$160.00; Return Postcard

(Identify type of correspondence)

Is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37
CFR 1.10 in an envelope addressed to:

Mail Stop Provisional Patent Application,

Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450

on August 20, 2003

Kathleen Libby*(Typed or Printed Name of Person Mailing Correspondence)*
*(Signature of Person Mailing Correspondence)*EV 321471065 US*("Express Mail" Mailing Label Number)***Note: Each paper must have its own certificate of mailing.**

ABSORBENT CORES FOR ABSORBENT ARTICLES AND METHOD FOR MAKING SAME**FIELD OF THE INVENTION**

This invention relates to absorbent articles that contain superabsorbent polymers, and the methods of making such articles. More particularly, this invention relates to absorbent cores used in absorbent articles.

BACKGROUND OF THE INVENTION

Currently available absorbent articles include tissues that contain superabsorbent polymers (SAP), and air laid composites containing SAP particles and/or superabsorbent fibers. Traditional methods of absorbent article manufacture use SAP applied as a solid particulate material. Although the SAP particles in such absorbent articles afford the advantage of providing very high water absorbency, many of the particles shake out during preparation of the articles on high speed manufacturing machines.

One attempt to deal with the issue of shake-out is described in U.S. Patent No. 5,641,561 to Hansen et al. Hansen et al. described absorbent composites made of fibrous material (e.g. cellulosic or synthetic material) and SAP

particles that are bound to the fiber via hydrogen bonding binder molecules. SAP particles are mixed with bleached kraft fluff, heated and spread out to dry. The binder adheres the SAP particles to the fibers. The dried product is then fed through a hammermill and shunted to an airway line to produce a web containing 40% SAP particles attached to individual fibers.

U.S. Patent No. 5,593,399 to Tanzer discloses an absorbent article, namely a diaper, having two layers attached by an adhesive to provide attached zones and unattached zones to form pocket regions. Tanzer describes the use of SAP particles located within the pocket regions of the article to provide an absorbent laminate.

Another difficulty with absorbent products is that they sometimes exhibit a problem known as "gel blocking." This refers to the tendency of SAP particles, when evenly distributed in an absorbent matrix, to swell so much upon imbibing a fluid that they occlude the interstitial voids in the matrix, thereby restricting or preventing further fluid flow. The result is a tendency for leakage when a second flow of liquid occurs, since much of the SAP is inaccessible to the liquid due to the blocking effect. Thus, much of the SAP is inefficiently used.

Another problem with absorbent products is strength in that, upon exposure to a fluid, the entire substrate may become or remain wet. Because of such wetting, the strength may be diminished, leading to tearing problems.

Thus there remains a need for an improved absorbent article design that overcomes one or more of the foregoing problems associated with conventional designs.

SUMMARY OF THE INVENTION

5 In one exemplary aspect, the invention provides an absorbent article comprising a barrier layer, a cover layer extending substantially parallel to the barrier layer, and a superabsorbent polymer interposed between the cover layer and the barrier layer. The superabsorbent polymer is adhered to the article in a pattern configured to distribute fluid in the absorbent article, wherein at least one portion
10 extending essentially completely across the absorbent article is substantially devoid of the superabsorbent polymer.

 According to one exemplary embodiment, the absorbent article optionally includes a tissue layer interposed between the cover layer and the barrier layer. The superabsorbent polymer is optionally provided on the tissue layer in a
15 pattern configured to distribute fluid in the absorbent article.

 In another exemplary aspect, the invention provides a method of making an absorbent article. The method includes positioning a superabsorbent polymer adjacent a barrier layer in a pattern to form at least one region including the superabsorbent polymer and at least one region substantially devoid of the
20 superabsorbent polymer extending essentially completely across the barrier layer, thereby providing the region substantially devoid of superabsorbent polymer with greater tear resistance than the region including the superabsorbent polymer. A

cover layer is attached substantially parallel to and substantially coextensive with the barrier layer, thereby interposing the superabsorbent polymer between the barrier layer and the cover layer.

In yet another exemplary embodiment, the method includes

5 positioning a liquid comprising a superabsorbent precursor adjacent a barrier layer in a pattern to form at least one region including the superabsorbent precursor and at least one region substantially devoid of the superabsorbent precursor extending essentially completely across the barrier layer, thereby providing the region substantially devoid of superabsorbent polymer with greater tear resistance than the

10 region including the superabsorbent polymer. The superabsorbent precursor is converted to a superabsorbent polymer, thereby forming at least one region including the superabsorbent polymer and at least one region devoid of the superabsorbent polymer. A cover layer is coupled substantially parallel to and substantially coextensive with the barrier layer, thereby interposing the

15 superabsorbent polymer between the barrier layer and the cover layer.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a cross-sectional view of a conventional absorbent article comprising a core incorporating a tissue having multiple folds.

Figure 2A is a cross-sectional view of an exemplary embodiment of an

20 absorbent article, according to aspects of this invention, comprising a core incorporating a superabsorbent polymer.

Figure 2B is a cross-sectional view of another exemplary embodiment of an absorbent article comprising a core layer incorporating SAP, with the core layer being a folded sheet.

Figs. 3A-3F are top views of portions of absorbent articles in which a variety of patterns of superabsorbent polymer distribution are shown, according to exemplary embodiments of the invention.

Figure 4 is a cross-sectional view of yet another exemplary embodiment of the present invention.

Figure 5 is a top view of the absorbent article of Figure 4, showing one exemplary pattern of superabsorbent polymer application.

DETAILED DESCRIPTION OF THE INVENTION

This invention will now be described with reference to specific embodiments selected for illustration in the drawings, wherein similar numbers indicate similar features. It will be appreciated that the spirit and scope of this invention are not limited to the embodiments selected for illustration. Instead, the scope of this invention is defined separately in the appended claims. Also, it will be appreciated that the drawings are not rendered to any particular proportion or scale.

An absorbent article and method of making such an article are provided. More specifically, exemplary embodiments of this invention relate to an absorbent article wherein liquid superabsorbent polymer has been applied either directly to a fluid-impermeable barrier layer or to a porous core positioned adjacent

the barrier layer, in any of a variety of patterns. The absorbent core may be covered with a woven or non-woven, fluid-permeable cover layer on the surface opposite that of the barrier layer. A nonlimiting example of such an absorbent article is an underpad designed to provide fluid protection for beds and other external surfaces.

- 5 Other absorbent articles such as diapers, incontinence pads, and feminine hygiene pads, may also be made according to this invention.

As used herein, the terms "liquid SAP" and "liquid superabsorbent polymer" mean a liquid comprising one or more crosslinked or uncrosslinked superabsorbent polymers in dispersed or dissolved form, or a liquid comprising one or more superabsorbent precursors, or a combination of these. Superabsorbent precursors include *inter alia* oligomers and monomers that, after placement on a substrate, are subsequently converted, for example by polymerization and/or crosslinking, to a superabsorbent polymer.

Application of liquid SAP to an absorbent article provides the article with added total absorbent capacity, thereby reducing the amount of core material needed to obtain a targeted total capacity. Since less material is needed to obtain targeted total absorption capacity, a thin absorbent material may be provided by the present invention. Thus, in order to provide an "ultra-thin" absorbent core, use of the liquid superabsorbent reduces the number and/or thickness of layers needed to obtain a targeted total absorbent capacity. This type of construction affords a thinner product, desirable for comfort and/or cost savings on material consumption and handling. The liquid SAP may be applied to the core. For some applications, no core at all may be used, with SAP being only on the barrier layer of the absorbent article.

Figure 1 shows a prior art absorbent article 1 in which an absorbent core 8 is interposed between a barrier layer 2 and a cover layer 4, both of which are typically adhered to core 8 by means of adhesive 10. Core 8 comprises an absorbent substrate that is symmetrically folded upon itself such that all of the layers extend substantially parallel and substantially coextensive with each other. Typically, cover layer 4 and barrier layer 2 are adhered together in areas beyond core 8 around the perimeter (not shown), in order to provide structural integrity for the absorbent article.

Figure 2A shows, in one exemplary embodiment of the invention, an absorbent article 101, in which core 108 is a single layer of material. SAP 106 is present in a pattern on the core 108, which may be adhered with adhesive 110 to a cover layer 104 and a barrier layer 102. As used herein, when SAP is stated to be "on" or "adhered to" a core, it is to be understood that some of the SAP, having been deposited in a liquid form, may penetrate into interstices or pores of the core, which may or may not have interstices or pores depending upon the core selected.

The core 108 may be preferably made of any cellulosic material such as for example tissue or paper towel sheets, especially when a lower product cost is desired. The use of tissue is also advantageous in providing a low weight pad, and one of good wet integrity. Pulp may also be used in the core. Specifically, core 108 may comprise a single layer of defibrated pulp embossed for rapid fluid absorption and dispersion. Other types of cores may also be used. Nonlimiting examples include fibrous webs made of natural or synthetic fibers, for example, woven fabric, non-woven fabric, paper and knit fabric. Also, hydrophilic fibers such as wood pulp, cotton, wool, rayon, acetate, and vinylon, for example may be used for making core

108. An air laid composite may also be used. As discussed elsewhere, the core can also be eliminated from the absorbent article.

The barrier layer 102 may be made of any liquid impermeable material such as polyethylene, polypropylene, a copolymer thereof, polyester, and bi-
5 component fibers. Other suitable materials include acrylic, nylon, and polyvinyl chloride. The barrier layer 102 prevents the passage of liquid and covers the underside of the absorbent article for protection against leakage.

Cover layer 106 may be formed of a woven or non-woven material, such as a substrate of thermoplastic fibers, or an apertured film. Materials used for
10 cover layers are well known in the art and are selected from materials that are fluid permeable; that is, they allow the passage of liquid therethrough. The cover layer 106 and the barrier layer 102 are typically attached to the core 108 by means of adhesive 110, but other means may also be used in addition or instead.

One type of adhesive 110 that may be used is a hot melt pressure-
15 sensitive adhesive. Such adhesives typically comprise one or more base polymers, one or more tackifying resins, a plasticizer, one or more waxes, and a filler and/or a pigment. Base polymers include for example polyethylene, amorphous polypropylene, ethylene-vinyl acetate copolymers, or block copolymers. Tackifying
resins include for example hydrocarbon resins, rosin esters, or terpene-based resins
20 made from such feedstocks as alpha pinene, beta pinene, limonene, dipentene, and related materials. Wax types include paraffin, microcrystalline, or synthetic waxes. Plasticizer types include for example polybutene and mineral oil. Other additives may include for example antioxidants such as sterically hindered phenols,

phosphites, synergists or amides. In addition, other types of adhesive such as cold glue emulsions or cohesives may be used.

SAP 106 is positioned by applying a liquid SAP in a pattern designed to ensure that absorption of the insult will occur primarily where the liquid
5 superabsorbent is applied. Thus, the liquid SAP permits a controlled application of the SAP especially in specific patterns, as will be discussed below. Also, by using liquid SAP, the manufacturer may be able to make a finished product on converting lines without pulp hammer mills, if that is desired.

Numerous liquid SAPs are known in the art. Nonlimiting examples of
10 liquid SAPs suitable for use with this invention will now be described. In all cases, the final result is the formation of a superabsorbent polymer adhered to one or both of the barrier layer and the core.

U.S. Patent No. 4,944,963 to Dabi, incorporated herein by reference, describes forming a terpolymer of methyl methacrylate, acrylic acid, and glycidyl
15 methacrylate, with the terpolymer subsequently being neutralized. The resulting solution is applied to a polyester fibrous weave in an aqueous form. Excess solution is removed by vacuum, and the fiber/polyester composite is heated for 20 minutes at 120°C to create a structure of 40% fibrous weave and 60% crosslinked polymer.

U.S. Patent No. 5,853,867 to Harada, incorporated herein by
20 reference, describes a cationic absorbent polymer applied to a fibrous polyester weave as a monomer solution, with the monomer subsequently being polymerized on the weave by heating. Alternatively, preformed polymer may be applied.
Halogenated alkyl quaternary salts of dialkylamino (meth)acrylates are effectively

used for the production of the polymers, and include the halogenated alkyl quaternary salts of such monomers as N,N-dimethylaminoethyl (meth)acrylate; N,N-dimethylaminopropyl (meth)acrylate; N,N-diethylaminobutyl (meth)acrylate; N,N-diethylaminoethyl (meth)acrylate; and N,N-diethylaminopropyl (meth)acrylate; for example. As used herein, the term "(meth)acrylate" means methacrylate and/or acrylate. Such a cationic absorbent polymer may be applied in a suitable liquid form, such as for example a solution, by means of spraying or spreading to the supporting member and fixed thereto. Preferably, the fixation of the cationic absorbent polymer to the supporting member is attained by depositing a monomer or mixture of monomers in the form of an aqueous solution on the supporting member by means of impregnation, for example, and polymerizing or polycondensing the applied layer of the monomer solution.

Another suitable liquid SAP is disclosed in U.S. Pat. No. 6,417,425 to Whitmore et al., incorporated herein by reference. There is described a sprayable composition comprising a monomer such as acrylic acid, methacrylic acid, and/or salts of these; a crosslinker such as ethoxylated and propoxylated trimethylolpropane triacrylate derivatives such as SR-9035 and SR-492 available from Sartomer Co., Inc. of Exton, Pa.; a polymerization initiator such as 2,2'-azobis(2-(2-imidazole-2-yl))propane dihydrochloride, and solid superabsorbent particles prepared for example from acrylic acid and crosslinked with for example an unsaturated crosslinking agent such as tetraallyloxyethane, all in aqueous solution. The mixture can be sprayed onto a fibrous substrate and subsequently cured via heating or exposure to electron beam or ultraviolet radiation, to form a superabsorbent polymer matrix.

Liquid SAP applied to a core may penetrate essentially through the entire thickness thereof. In a preferred embodiment, however, the superabsorbent polymer 106 is more heavily concentrated on one surface of core 108. That surface is positioned adjacent the barrier layer 102 for the purpose of avoiding gel blocking.

5 In other words, the side of the core 108 that contains the highest loading of the superabsorbent polymer 106 is positioned to face the barrier layer 102. Since SAP 106 swells when wet, it tends to occlude the microscopic fluid wicking channels between the pulp fibers. By positioning the side of core 108 having less (or no) SAP nearer the cover layer 104, which is adjacent the user's body, fluids pass through
10 portions of the core 108 where there is a diminished chance of gel blocking, before the fluid finally reaches the heavier concentration of SAP near the barrier layer 102.

Figure 2B shows another exemplary embodiment of the invention, in which core 208 is a folded layer of material. SAP 206 may be incorporated on either one half of or the entire width of core 208, which is then folded. The core 208 is
15 then interposed between cover layer 204 and barrier layer 202, with the assembly being bonded together with adhesive 210.

Figures 3A through 3F show top views of several possible, nonlimiting versions of core 108 corresponding to the absorbent article of Figure 2A according to exemplary embodiments of the invention, differing from each other in the pattern in
20 which SAP 106 has been applied to core 108. Although the discussion here will generally refer to a one-layer core such as shown in Figure 2A, the discussion also applies to folded structures such as shown in Figure 2B, where the patterns may be present on one or more of the folds. Although core 108 is shown here as a square, it may instead be any other convenient shape.

Figures 3A-3F show examples of core 108, indicating that the patterns of SAP 106 may be arranged such that there exist regions 119 devoid of SAP. In all of the exemplary embodiments illustrated in Figures 3A-3F, there is at least one direction across the surface of core 108 in which tearing would require separation
5 across regions devoid of SAP. While such a configuration is preferred, however, it is not a critical feature of the invention.

Such areas devoid of SAP, by virtue of being adjacent areas with SAP, remain drier than would be the case if there were SAP present in them. The result is that these areas retain much of their strength even when the absorbent article is
10 wet, since the SAP imbibes most of the water. Thus the likelihood of accidental tearing of core 108 is reduced, according to an exemplary aspect of the invention. In addition, as seen in Figures 3A-3E, there may optionally be continuous SAP-free zones 120 along one or more edges of the absorbent article. Such zones provide an extra element of protection against tearing when the article is wetted but they are
15 not required. In the case of Figure 3D, where the diagonal lines indicate a full continuous coverage of SAP 106, the only SAP-free areas are those afforded by SAP-free zone 120. Figure 3D shows continuous SAP-free zones 120 extending not only along the side borders, but along the top and bottom of core 108 as well.

The application of the liquid SAP may be performed in a variety of
20 patterns as shown in Figs. 3A-3F. These patterns include spiral patterns 3A, melt blown patterns 3B, multi-tracked patterns 3C, full coat patterns 3D, zoned spray patterns 3E, and intermittent patterns 3F. Patterned application of liquid SAP not only provides improved wet strength integrity to the tissue core; it also provides controlled distribution of fluid. Specifically, the patterns allow fluid to be drawn by

the SAP to specific regions of the absorbent article, while leaving other areas devoid of SAP in order to maintain open porosity when wet. This preserves the presence of fluid distribution channels, thereby avoiding gel blocking.

In Figure 3F, the intermittent pattern provides tear resistance
5 diagonally, vertically, and horizontally since the non-SAP regions 119 must be crossed by a tear propagating in any of these directions.

Similarly, the melt blown pattern of Figure 3B provides tear resistance in the continuous "dry" zones 120 and in regions 119. Figure 3C has a striped pattern of SAP and non-SAP areas bordered by continuous zones 120 which provide
10 greater tear resistance than the areas containing SAP 106.

Figure 3D shows a full coat pattern of SAP 106 on a core 108 comprising tissue incorporating a wet strength resin (not shown) to afford additional tear resistance when wet. Suitable wet strength resins are well known in the art, and include for example Kymene® 557H wet strength resin, available from Hercules
15 Incorporated, Wilmington, DE. Tear resistance of core 108 in Figure 3D is further enhanced by the presence of continuous zones 120 devoid of SAP, extending along all four borders of core 108.

Figure 3E shows a core 108 with SAP 106 distributed in three zigzag patterns, separated by SAP-free areas 119 and bordered by SAP-free zones 120.
20 Although three zigzags are shown, there may be any number of them. In addition, they need not be parallel as shown in Figure 3E, and the zigzags need not have sharply defined corners.

Figure 3F shows a core with continuous zones 120 and regions 119 devoid of SAP 106, thereby providing greater tear resistance than the patterned areas containing SAP. In this embodiment, SAP-free region 119 is continuous, with islands of SAP 106 interspersed in it.

5 Figure 4 depicts another exemplary embodiment of the invention, showing an absorbent article 301 comprising a barrier layer 302, a cover layer 304, and SAP 306. The SAP resides directly on the barrier layer 302, which is bonded to cover layer 304 around the outer edges (not shown) of the article, using adhesive 310.

10 Figure 5 shows a top view of the barrier layer 302 of the absorbent article 301 of Figure 4, showing SAP 306 disposed in a striped pattern, according to one exemplary embodiment of the invention. Cover layer 304 is not shown, for clarity. Areas 319 devoid of SAP are present to afford improved fluid flow and reduced gel blocking, as described previously. By virtue of not using a core, a
15 thinner and more comfortable structure may be obtained.

The patterns of SAP shown in Figures 3A-3F may be obtained by use of commercially available application equipment, well known to those skilled in the art. For example, Figures 3A, 3E, and 3F represent patterns of SAP distribution that might typically be obtained using a spiral-spray nozzle head. The pattern of Figure
20 3A may be achieved by application in a "controlled fiberization" configuration using a low air pressure spray head. The patterns of Figures 3E and 3F may typically use higher air pressure, with the pattern of Figure 3E being continuous and that of Figure 3F being intermittent in terms of SAP distribution. The latter may typically be

produced by turning the nozzles on and off during the spraying process.

Figures 3C and 3D show patterns that might typically be achieved by applying liquid SAP with a slot-coat application nozzle, with Figure 3D being achieved by use of a single wide track and Figure 3C with multiple tracks. The pattern of
5 Figure 3B may typically be achieved via use of a melt-blown application nozzle, which produces noncontinuous, sporadic deposition of the SAP.

While preferred embodiments of the invention have been shown and described herein, it will be understood that such embodiments are provided by way of example only. Numerous variations, changes and substitutions will occur to those
10 skilled in the art without departing from the spirit of the invention.

For example, according to exemplary aspects of this invention, an absorbent article is optionally formed by application of SAP directly to a barrier layer of the absorbent article (see, for example, Figures 4 and 5). More specifically, SAP is optionally applied directly to a barrier layer to supplement a core interposed between
15 a barrier layer and a cover layer or to eliminate such a core.

According to one exemplary embodiment so configured, SAP is applied directly to a film barrier. The film barrier is optionally embossed film and may be embossed to have a "male" side opposite a "female" defining cavities. If such an embossed film barrier is utilized, the SAP is preferably applied to the female side of
20 the embossed film so as to at least partially fill the cavities. The SAP is optionally applied to such a film barrier in patterns to facilitate fluid distribution. To do so, a liquid SAP may be applied in a manner set forth previously.

It is intended that the appended claims cover all such variations as fall within the spirit and scope of the invention. The invention having been described, the following and their equivalents are now claimed.

What is Claimed:

1 1. An absorbent article comprising:
2 a barrier layer;
3 a cover layer extending substantially parallel to said barrier layer; and
4 a superabsorbent polymer interposed between said cover layer and
5 said barrier layer, said superabsorbent polymer being adhered to said article in a
6 pattern configured to distribute fluid in said absorbent article, wherein at least one
7 portion of said absorbent article extending essentially completely across said
8 absorbent article is substantially devoid of said superabsorbent polymer.

1 2. The absorbent article of claim 1 further comprising a core
2 interposed between said cover layer and said barrier layer, wherein said
3 superabsorbent polymer is applied to said core or said barrier layer in said pattern.

1 3. The absorbent article of claim 1 wherein said pattern is
2 configured to increase resistance of said absorbent article to tearing, said at least
3 one portion of said absorbent article extending essentially completely across said
4 absorbent article being more resistant to tearing than at least one other portion of
5 said absorbent article.

1 4. The absorbent article of claim 1 further comprising a core
2 interposed between said cover layer and said barrier layer, wherein said core
3 comprises at least one of cellulose and cellulose acetate.

1 5. The absorbent article of claim 4 wherein said core is selected
2 from the group consisting of tissue, air laid composite, and paper towel sheet.

1 6. The absorbent article of claim 1 wherein said barrier layer
2 comprises a material selected from the group consisting of polyethylene,
3 polypropylene, copolymers of polyethylene and polypropylene, polyester, and bi-
4 component fibers.

1 7. The absorbent article of claim 1 wherein said cover layer
2 comprises one or both of a non-woven material and an apertured film.

1 8. The absorbent article of claim 1 wherein said pattern forms at
2 least one region including said superabsorbent polymer and at least one continuous
3 zone that is substantially devoid of said superabsorbent polymer, said continuous
4 zone having greater tear resistance than said region including said superabsorbent
5 polymer.

1 9. The absorbent article of claim 8 wherein said pattern is selected
2 from the group consisting of a spiral pattern, a melt blown pattern, a multi-tracked
3 pattern, a full coat pattern, a zoned spray pattern, and an intermittent pattern.

1 10. The absorbent article of claim 1 wherein said superabsorbent
2 polymer is formed from one or more of a polymer in liquid form and a polymer
3 formed by conversion of a superabsorbent precursor, said superabsorbent precursor
4 comprising one or both of a monomer and an oligomer.

1 11. A method of making an absorbent article comprising the steps
2 of:

3 a) positioning a superabsorbent polymer adjacent a barrier layer in a
4 pattern to form at least one region including the superabsorbent polymer and at least

5 one region substantially devoid of said superabsorbent polymer extending essentially
6 completely across the barrier layer, thereby providing the region substantially devoid
7 of superabsorbent polymer with greater tear resistance than the region including the
8 superabsorbent polymer; and

9 b) attaching a cover layer substantially parallel to and substantially
10 coextensive with said barrier layer, thereby interposing said superabsorbent polymer
11 between the barrier layer and the cover layer.

1 12. The method of claim 11 further comprising the step of
2 interposing a core between the barrier layer and the cover layer, wherein said
3 positioning step comprises applying the superabsorbent polymer to the core.

1 13. A method of making an absorbent article comprising the steps
2 of:

3 a) positioning a liquid comprising a superabsorbent precursor adjacent
4 a barrier layer in a pattern to form at least one region including the superabsorbent
5 precursor and at least one region substantially devoid of the superabsorbent
6 precursor extending essentially completely across the barrier layer, thereby providing
7 the region substantially devoid of superabsorbent polymer with greater tear
8 resistance than the region including the superabsorbent polymer;

9 b) converting the superabsorbent precursor to a superabsorbent
10 polymer, thereby forming at least one region including the superabsorbent polymer
11 and at least one region devoid of the superabsorbent polymer; and

12 c) coupling a cover layer to the barrier layer, thereby interposing the
13 superabsorbent polymer between the barrier layer and the cover layer.

1 14. The method of claim 13 further comprising the step of
2 interposing a core between the barrier layer and the cover layer, wherein said
3 positioning step comprises applying the liquid to the core.

1 15. An absorbent article comprising:
2 a barrier layer;
3 a cover layer extending substantially parallel to said barrier layer;
4 an absorbent layer interposed between said cover layer and said
5 barrier layer; and
6 a superabsorbent polymer applied in liquid form to said absorbent
7 layer, said superabsorbent polymer being applied in a pattern configured to distribute
8 fluid in said absorbent article, wherein portions of said absorbent layer are at least
9 partially coated with said superabsorbent polymer and other portions of said
10 absorbent layer are substantially free of said superabsorbent polymer.

1 16. An absorbent underpad comprising:
2 a barrier layer;
3 a cover layer extending substantially parallel to said barrier layer;
4 a tissue layer interposed between said cover layer and said barrier
5 layer; and
6 a superabsorbent polymer applied in liquid form to said absorbent
7 layer, said superabsorbent polymer being applied in a pattern configured to distribute
8 fluid in said absorbent article, wherein portions of said absorbent layer are at least
9 partially coated with said superabsorbent polymer and other portions of said
10 absorbent layer are substantially free of said superabsorbent polymer.

ABSTRACT

An absorbent article is provided, including a barrier layer, a cover layer extending substantially parallel to the barrier layer, and a superabsorbent polymer interposed between the cover layer and the barrier layer. The superabsorbent polymer is adhered to the article in a pattern configured to distribute fluid in the absorbent article, wherein at least one portion extending essentially completely across the absorbent article is substantially devoid of the superabsorbent polymer.

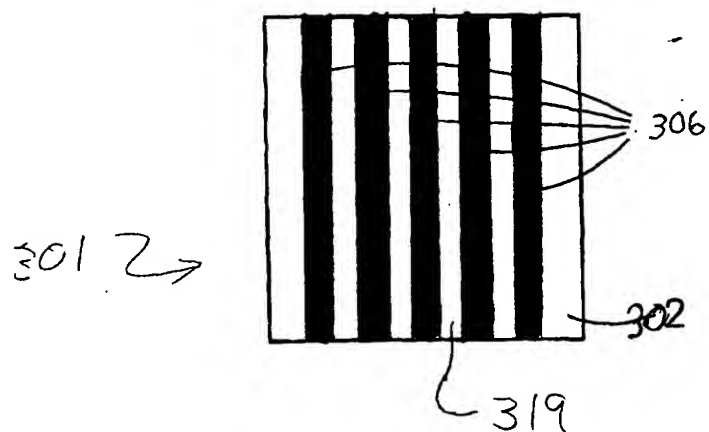
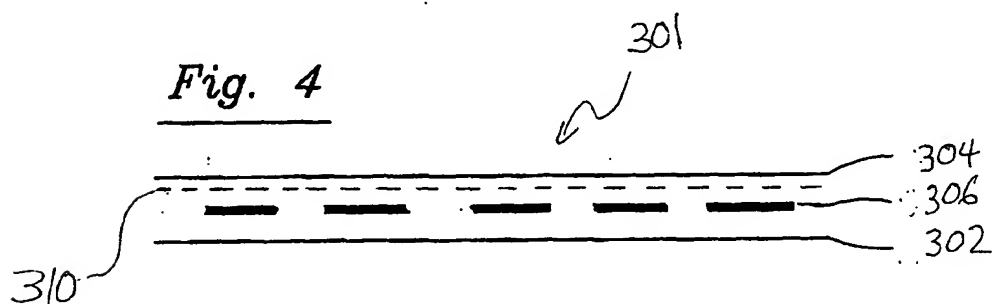
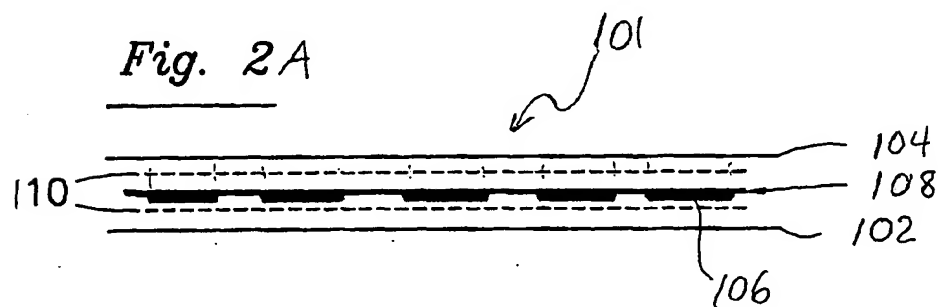
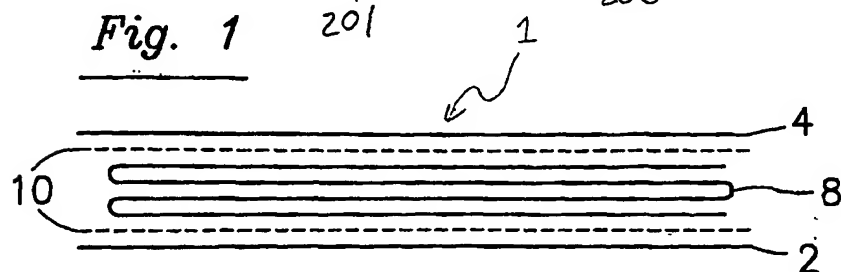
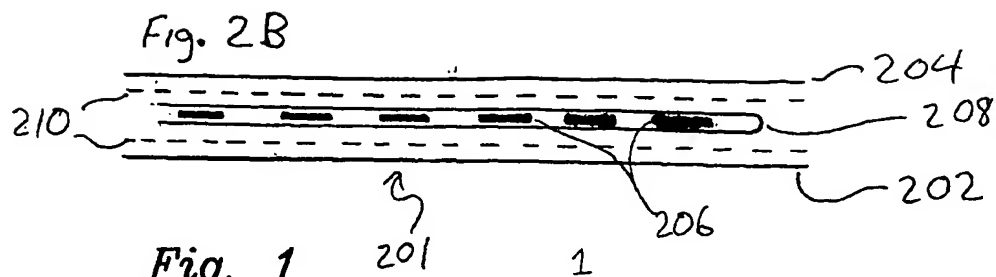


Fig. 3A

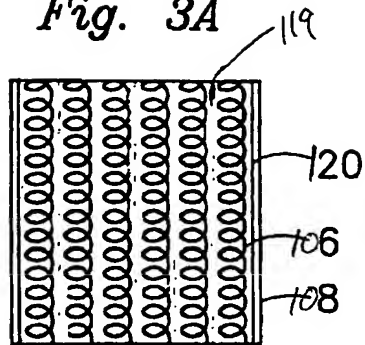


Fig. 3B

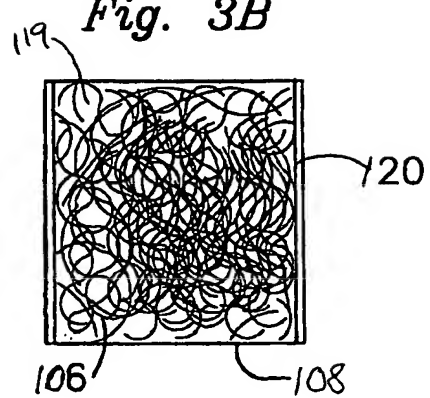


Fig. 3C

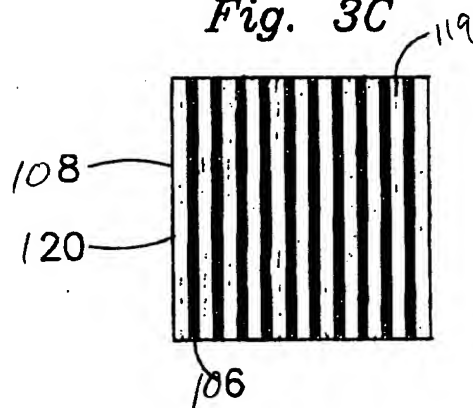


Fig. 3D

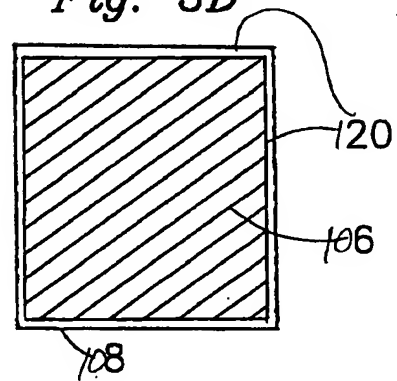


Fig. 3E

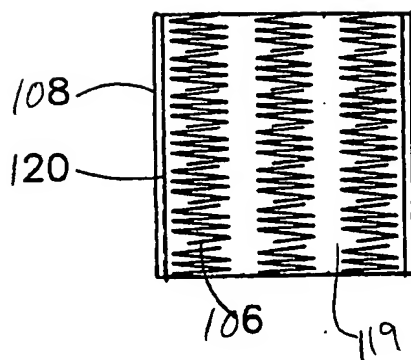


Fig. 3F

